
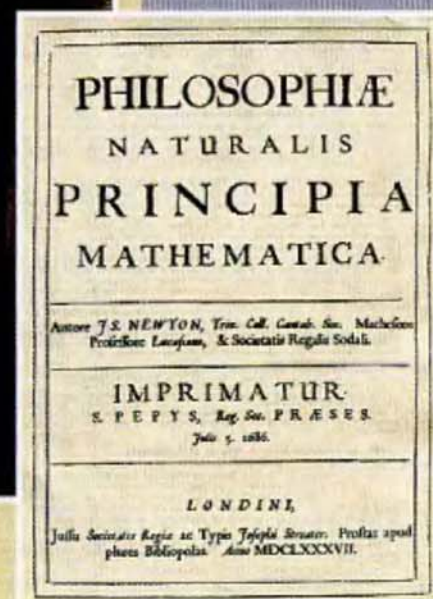


# Introduction

# 1

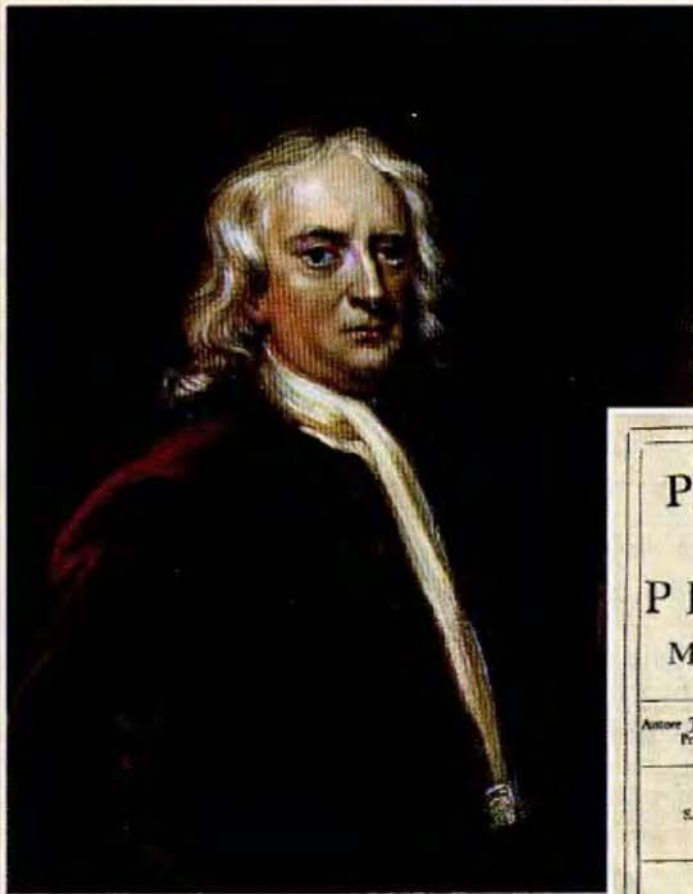

In the latter part of the seventeenth century, Sir Isaac Newton stated the fundamental principles of mechanics, which are the foundation of much of today's engineering. His *Principia*, published in 1687, summarized his work in terrestrial, celestial, and fluid mechanics.

## INTRODUCTION

- 1.1 What Is Mechanics?
- 1.2 Fundamental Concepts and Principles
- 1.3 Systems of Units
- 1.4 Conversion from One System of Units to Another
- 1.5 Method of Problem Solution
- 1.6 Numerical Accuracy

### 1.1. WHAT IS MECHANICS?

Mechanics can be defined as that science which describes and predicts the conditions of rest or motion of bodies under the action of forces. It is divided into three parts: mechanics of *rigid bodies*, mechanics of *deformable bodies*, and mechanics of *fluids*.

The mechanics of rigid bodies is subdivided into *statics* and *dynamics*, the former dealing with bodies at rest, the latter with bodies in motion. In this part of the study of mechanics, bodies are assumed to be perfectly rigid. Actual structures and machines, however, are never absolutely rigid and deform under the loads to which they are subjected. But these deformations are usually small and do not appreciably affect the conditions of equilibrium or motion of the structure under consideration. They are important, though, as far as the resistance of the structure to failure is concerned and are studied in mechanics of materials, which is a part of the mechanics of deformable bodies. The third division of mechanics, the mechanics of fluids, is subdivided into the study of *incompressible fluids* and of *compressible fluids*. An important subdivision of the study of incompressible fluids is *hydraulics*, which deals with problems involving water.

Mechanics is a physical science, since it deals with the study of physical phenomena. However, some associate mechanics with mathematics, while many consider it as an engineering subject. Both these views are justified in part. Mechanics is the foundation of most engineering sciences and is an indispensable prerequisite to their study. However, it does not have the *empiricism* found in some engineering sciences, that is, it does not rely on experience or observation alone; by its rigor and the emphasis it places on deductive reasoning it resembles mathematics. But, again, it is not an *abstract* or even a *pure* science; mechanics is an *applied* science. The purpose of mechanics is to explain and predict physical phenomena and thus to lay the foundations for engineering applications.

### 1.2. FUNDAMENTAL CONCEPTS AND PRINCIPLES

Although the study of mechanics goes back to the time of Aristotle (384–322 B.C.) and Archimedes (287–212 B.C.), one has to wait until Newton (1642–1727) to find a satisfactory formulation of its fundamental principles. These principles were later expressed in a modified form by d'Alembert, Lagrange, and Hamilton. Their validity remained unchallenged, however, until Einstein formulated his *theory of relativity* (1905). While its limitations have now been recognized, *newtonian mechanics* still remains the basis of today's engineering sciences.

The basic concepts used in mechanics are *space*, *time*, *mass*, and *force*. These concepts cannot be truly defined; they should be accepted on the basis of our intuition and experience and used as a mental frame of reference for our study of mechanics.

The concept of *space* is associated with the notion of the position of a point  $P$ . The position of  $P$  can be defined by three lengths measured from a certain reference point, or *origin*, in three given directions. These lengths are known as the *coordinates* of  $P$ .

To define an event, it is not sufficient to indicate its position in space. The *time* of the event should also be given.

The concept of *mass* is used to characterize and compare bodies on the basis of certain fundamental mechanical experiments. Two bodies of the same mass, for example, will be attracted by the earth in the same manner; they will also offer the same resistance to a change in translational motion.

A *force* represents the action of one body on another. It can be exerted by actual contact or at a distance, as in the case of gravitational forces and magnetic forces. A force is characterized by its *point of application*, its *magnitude*, and its *direction*; a force is represented by a *vector* (Sec. 2.3).

In newtonian mechanics, space, time, and mass are absolute concepts, independent of each other. (This is not true in *relativistic mechanics*, where the *time* of an event depends upon its position, and where the mass of a body varies with its velocity.) On the other hand, the concept of force is not independent of the other three. Indeed, one of the fundamental principles of newtonian mechanics listed below indicates that the resultant force acting on a body is related to the mass of the body and to the manner in which its velocity varies with time.

You will study the conditions of rest or motion of particles and rigid bodies in terms of the four basic concepts we have introduced. By *particle* we mean a very small amount of matter which may be assumed to occupy a single point in space. A *rigid body* is a combination of a large number of particles occupying fixed positions with respect to each other. The study of the mechanics of particles is obviously a prerequisite to that of rigid bodies. Besides, the results obtained for a particle can be used directly in a large number of problems dealing with the conditions of rest or motion of actual bodies.

The study of elementary mechanics rests on six fundamental principles based on experimental evidence.

**The Parallelogram Law for the Addition of Forces.** This states that two forces acting on a particle may be replaced by a single force, called their *resultant*, obtained by drawing the diagonal of the parallelogram which has sides equal to the given forces (Sec. 2.2).

**The Principle of Transmissibility.** This states that the conditions of equilibrium or of motion of a rigid body will remain unchanged if a force acting at a given point of the rigid body is replaced by a force of the same magnitude and same direction, but acting at a different point, provided that the two forces have the same line of action (Sec. 3.3).

**Newton's Three Fundamental Laws.** Formulated by Sir Isaac Newton in the latter part of the seventeenth century, these laws can be stated as follows:

**FIRST LAW.** If the resultant force acting on a particle is zero, the particle will remain at rest (if originally at rest) or will move with constant speed in a straight line (if originally in motion) (Sec. 2.10).

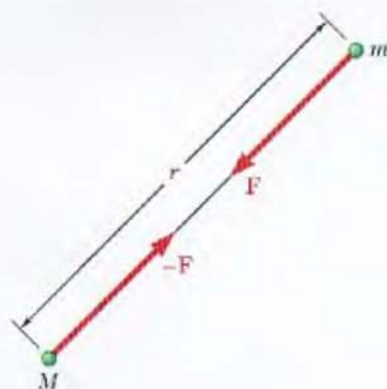


Fig. 1.1



**Photo 1.1** When in earth orbit, people and objects are said to be *weightless* even though the gravitational force acting is approximately 90% of that experienced on the surface of the earth. This apparent contradiction will be resolved in Chapter 12 when we apply Newton's second law to the motion of particles.

**SECOND LAW.** If the resultant force acting on a particle is not zero, the particle will have an acceleration proportional to the magnitude of the resultant and in the direction of this resultant force.

As you will see in Sec. 12.2, this law can be stated as

$$\mathbf{F} = m\mathbf{a} \quad (1.1)$$

where  $\mathbf{F}$ ,  $m$ , and  $\mathbf{a}$  represent, respectively, the resultant force acting on the particle, the mass of the particle, and the acceleration of the particle, expressed in a consistent system of units.

**THIRD LAW.** The forces of action and reaction between bodies in contact have the same magnitude, same line of action, and opposite sense (Sec. 6.1).

**Newton's Law of Gravitation.** This states that two particles of mass  $M$  and  $m$  are mutually attracted with equal and opposite forces  $\mathbf{F}$  and  $-\mathbf{F}$  (Fig. 1.1) of magnitude  $F$  given by the formula

$$F = G \frac{Mm}{r^2} \quad (1.2)$$

where  $r$  = distance between the two particles

$G$  = universal constant called the *constant of gravitation*

Newton's law of gravitation introduces the idea of an action exerted at a distance and extends the range of application of Newton's third law: the action  $\mathbf{F}$  and the reaction  $-\mathbf{F}$  in Fig. 1.1 are equal and opposite, and they have the same line of action.

A particular case of great importance is that of the attraction of the earth on a particle located on its surface. The force  $\mathbf{F}$  exerted by the earth on the particle is then defined as the *weight*  $\mathbf{W}$  of the particle. Taking  $M$  equal to the mass of the earth,  $m$  equal to the mass of the particle, and  $r$  equal to the radius  $R$  of the earth, and introducing the constant

$$g = \frac{GM}{R^2} \quad (1.3)$$

the magnitude  $W$  of the weight of a particle of mass  $m$  may be expressed as†

$$W = mg \quad (1.4)$$

The value of  $R$  in formula (1.3) depends upon the elevation of the point considered; it also depends upon its latitude, since the earth is not truly spherical. The value of  $g$  therefore varies with the position of the point considered. As long as the point actually remains on the surface of the earth, it is sufficiently accurate in most engineering computations to assume that  $g$  equals  $9.81 \text{ m/s}^2$  or  $32.2 \text{ ft/s}^2$ .

†A more accurate definition of the weight  $\mathbf{W}$  should take into account the rotation of the earth.

The principles we have just listed will be introduced in the course of our study of mechanics as they are needed. The study of the statics of particles carried out in Chap. 2 will be based on the parallelogram law of addition and on Newton's first law alone. The principle of transmissibility will be introduced in Chap. 3 as we begin the study of the statics of rigid bodies, and Newton's third law in Chap. 6 as we analyze the forces exerted on each other by the various members forming a structure. In the study of dynamics, Newton's second law and Newton's law of gravitation will be introduced. It will then be shown that Newton's first law is a particular case of Newton's second law (Sec. 12.2) and that the principle of transmissibility could be derived from the other principles and thus eliminated (Sec. 16.5). In the meantime, however, Newton's first and third laws, the parallelogram law of addition, and the principle of transmissibility will provide us with the necessary and sufficient foundation for the entire study of the statics of particles, rigid bodies, and systems of rigid bodies.

As noted earlier, the six fundamental principles listed above are based on experimental evidence. Except for Newton's first law and the principle of transmissibility, they are independent principles which cannot be derived mathematically from each other or from any other elementary physical principle. On these principles rests most of the intricate structure of newtonian mechanics. For more than two centuries a tremendous number of problems dealing with the conditions of rest and motion of rigid bodies, deformable bodies, and fluids were solved by applying these fundamental principles. Many of the solutions obtained could be checked experimentally, thus providing a further verification of the principles from which they were derived. It was only in the last century that Newton's mechanics was found at fault, in the study of the motion of atoms and in the study of the motion of certain planets, where it must be supplemented by the theory of relativity. But on the human or engineering scale, where velocities are small compared with the speed of light, Newton's mechanics has yet to be disproved.

### 1.3. SYSTEMS OF UNITS

Associated with the four fundamental concepts introduced in the preceding section are the so-called *kinetic units*, that is, the units of *length*, *time*, *mass*, and *force*. These units cannot be chosen independently if Eq. (1.1) is to be satisfied. Three of the units may be defined arbitrarily; they are then referred to as *base units*. The fourth unit, however, must be chosen in accordance with Eq. (1.1) and is referred to as a *derived unit*. Kinetic units selected in this way are said to form a *consistent system of units*.

**International System of Units (SI Units)<sup>†</sup>.** In this system, which will be in universal use when the United States completes its conversion to SI units, the base units are the units of length, mass, and time, and they are called, respectively, the *meter* (m), the *kilogram* (kg), and the *second* (s). All three are arbitrarily defined. The second, which was originally chosen to represent 1/86 400 of the mean

<sup>†</sup>SI stands for *Système International d'Unités* (French).




Fig. 1.2

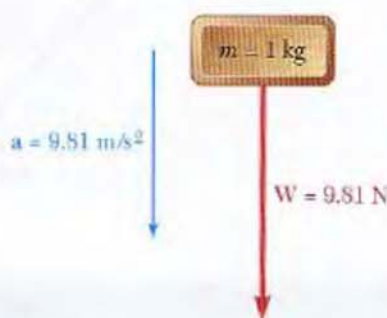


Fig. 1.3

solar day, is now defined as the duration of 9 192 631 770 cycles of the radiation corresponding to the transition between two levels of the fundamental state of the cesium-133 atom. The meter, originally defined as one ten-millionth of the distance from the equator to either pole, is now defined as 1 650 763.73 wavelengths of the orange-red light corresponding to a certain transition in an atom of krypton-86. The kilogram, which is approximately equal to the mass of  $0.001 \text{ m}^3$  of water, is defined as the mass of a platinum-iridium standard kept at the International Bureau of Weights and Measures at Sèvres, near Paris, France. The unit of force is a derived unit. It is called the *newton* (N) and is defined as the force which gives an acceleration of  $1 \text{ m/s}^2$  to a mass of 1 kg (Fig. 1.2). From Eq. (1.1) we write

$$1 \text{ N} = (1 \text{ kg})(1 \text{ m/s}^2) = 1 \text{ kg} \cdot \text{m/s}^2 \quad (1.5)$$

The SI units are said to form an *absolute* system of units. This means that the three base units chosen are independent of the location where measurements are made. The meter, the kilogram, and the second may be used anywhere on the earth; they may even be used on another planet. They will always have the same significance.

The *weight* of a body, or the *force of gravity* exerted on that body, should, like any other force, be expressed in newtons. From Eq. (1.4) it follows that the weight of a body of mass 1 kg (Fig. 1.3) is

$$\begin{aligned} W &= mg \\ &= (1 \text{ kg})(9.81 \text{ m/s}^2) \\ &= 9.81 \text{ N} \end{aligned}$$

Multiples and submultiples of the fundamental SI units may be obtained through the use of the prefixes defined in Table 1.1. The multiples and submultiples of the units of length, mass, and force most frequently used in engineering are, respectively, the *kilometer* (km) and the *millimeter* (mm); the *megagram*† (Mg) and the *gram* (g); and the *kilonewton* (kN). According to Table 1.1, we have

$$\begin{aligned} 1 \text{ km} &= 1000 \text{ m} & 1 \text{ mm} &= 0.001 \text{ m} \\ 1 \text{ Mg} &= 1000 \text{ kg} & 1 \text{ g} &= 0.001 \text{ kg} \\ & & 1 \text{ kN} &= 1000 \text{ N} \end{aligned}$$

The conversion of these units into meters, kilograms, and newtons, respectively, can be effected by simply moving the decimal point three places to the right or to the left. For example, to convert 3.82 km into meters, one moves the decimal point three places to the right:

$$3.82 \text{ km} = 3820 \text{ m}$$

Similarly, 47.2 mm is converted into meters by moving the decimal point three places to the left:

$$47.2 \text{ mm} = 0.0472 \text{ m}$$

†Also known as a *metric ton*.

Table 1.1. SI Prefixes

Multiplication Factor	Prefix†	Symbol
1 000 000 000 000 = $10^{12}$	tera	T
1 000 000 000 = $10^9$	giga	G
1 000 000 = $10^6$	mega	M
1 000 = $10^3$	kilo	k
100 = $10^2$	hecto‡	h
10 = $10^1$	deka‡	da
0.1 = $10^{-1}$	deci‡	d
0.01 = $10^{-2}$	centi‡	c
0.001 = $10^{-3}$	milli	m
0.000 001 = $10^{-6}$	micro	$\mu$
0.000 000 001 = $10^{-9}$	nano	n
0.000 000 000 001 = $10^{-12}$	pico	p
0.000 000 000 000 001 = $10^{-15}$	femto	f
0.000 000 000 000 000 001 = $10^{-18}$	atto	a

†The first syllable of every prefix is accented so that the prefix will retain its identity. Thus, the preferred pronunciation of kilometer places the accent on the first syllable, not the second.

‡The use of these prefixes should be avoided, except for the measurement of areas and volumes and for the nontechnical use of centimeter, as for body and clothing measurements.

Using scientific notation, one may also write

$$3.82 \text{ km} = 3.82 \times 10^3 \text{ m}$$

$$47.2 \text{ mm} = 47.2 \times 10^{-3} \text{ m}$$

The multiples of the unit of time are the *minute* (min) and the *hour* (h). Since  $1 \text{ min} = 60 \text{ s}$  and  $1 \text{ h} = 60 \text{ min} = 3600 \text{ s}$ , these multiples cannot be converted as readily as the others.

By using the appropriate multiple or submultiple of a given unit, one can avoid writing very large or very small numbers. For example, one usually writes 427.2 km rather than 427 200 m, and 2.16 mm rather than 0.002 16 m.†

**Units of Area and Volume.** The unit of area is the *square meter* ( $\text{m}^2$ ), which represents the area of a square of side 1 m; the unit of volume is the *cubic meter* ( $\text{m}^3$ ), equal to the volume of a cube of side 1 m. In order to avoid exceedingly small or large numerical values in the computation of areas and volumes, one uses systems of subunits obtained by respectively squaring and cubing not only the millimeter but also two intermediate submultiples of the meter, namely, the *decimeter* (dm) and the *centimeter* (cm). Since, by definition,

$$1 \text{ dm} = 0.1 \text{ m} = 10^{-1} \text{ m}$$

$$1 \text{ cm} = 0.01 \text{ m} = 10^{-2} \text{ m}$$

$$1 \text{ mm} = 0.001 \text{ m} = 10^{-3} \text{ m}$$

†It should be noted that when more than four digits are used on either side of the decimal point to express a quantity in SI units—as in 427 200 m or 0.002 16 m—spaces, never commas, should be used to separate the digits into groups of three. This is to avoid confusion with the comma used in place of a decimal point, which is the convention in many countries.

the submultiples of the unit of area are

$$1 \text{ dm}^2 = (1 \text{ dm})^2 = (10^{-1} \text{ m})^2 = 10^{-2} \text{ m}^2$$

$$1 \text{ cm}^2 = (1 \text{ cm})^2 = (10^{-2} \text{ m})^2 = 10^{-4} \text{ m}^2$$

$$1 \text{ mm}^2 = (1 \text{ mm})^2 = (10^{-3} \text{ m})^2 = 10^{-6} \text{ m}^2$$

and the submultiples of the unit of volume are

$$1 \text{ dm}^3 = (1 \text{ dm})^3 = (10^{-1} \text{ m})^3 = 10^{-3} \text{ m}^3$$

$$1 \text{ cm}^3 = (1 \text{ cm})^3 = (10^{-2} \text{ m})^3 = 10^{-6} \text{ m}^3$$

$$1 \text{ mm}^3 = (1 \text{ mm})^3 = (10^{-3} \text{ m})^3 = 10^{-9} \text{ m}^3$$

It should be noted that when the volume of a liquid is being measured, the cubic decimeter ( $\text{dm}^3$ ) is usually referred to as a *liter* (L).

Other derived SI units used to measure the moment of a force, the work of a force, etc., are shown in Table 1.2. While these units will be introduced in later chapters as they are needed, we should note an important rule at this time: When a derived unit is obtained by dividing a base unit by another base unit, a prefix may be used in the numerator of the derived unit but not in its denominator. For example, the constant  $k$  of a spring which stretches 20 mm under a load of 100 N will be expressed as

$$k = \frac{100 \text{ N}}{20 \text{ mm}} = \frac{100 \text{ N}}{0.020 \text{ m}} = 5000 \text{ N/m} \quad \text{or} \quad k = 5 \text{ kN/m}$$

but never as  $k = 5 \text{ N/mm}$ .

**Table 1.2. Principal SI Units Used in Mechanics**

Quantity	Unit	Symbol	Formula
Acceleration	Meter per second squared	...	$\text{m/s}^2$
Angle	Radian	rad	†
Angular acceleration	Radian per second squared	...	$\text{rad/s}^2$
Angular velocity	Radian per second	...	$\text{rad/s}$
Area	Square meter	...	$\text{m}^2$
Density	Kilogram per cubic meter	...	$\text{kg/m}^3$
Energy	Joule	J	$\text{N} \cdot \text{m}$
Force	Newton	N	$\text{kg} \cdot \text{m/s}^2$
Frequency	Hertz	Hz	$\text{s}^{-1}$
Impulse	Newton-second	...	$\text{kg} \cdot \text{m/s}$
Length	Meter	m	‡
Mass	Kilogram	kg	‡
Moment of a force	Newton-meter	...	$\text{N} \cdot \text{m}$
Power	Watt	W	$\text{J/s}$
Pressure	Pascal	Pa	$\text{N/m}^2$
Stress	Pascal	Pa	$\text{N/m}^2$
Time	Second	s	‡
Velocity	Meter per second	...	$\text{m/s}$
Volume			
Solids	Cubic meter	...	$\text{m}^3$
Liquids	Liter	L	$10^{-3} \text{ m}^3$
Work	Joule	J	$\text{N} \cdot \text{m}$

†Supplementary unit (1 revolution =  $2\pi \text{ rad} = 360^\circ$ ).

‡Base unit.



**U.S. Customary Units.** Most practicing American engineers still commonly use a system in which the base units are the units of length, force, and time. These units are, respectively, the *foot* (ft), the *pound* (lb), and the *second* (s). The second is the same as the corresponding SI unit. The foot is defined as 0.3048 m. The pound is defined as the *weight* of a platinum standard, called the *standard pound*, which is kept at the National Institute of Standards and Technology outside Washington, the mass of which is 0.453 592 43 kg. Since the weight of a body depends upon the earth's gravitational attraction, which varies with location, it is specified that the standard pound should be placed at sea level and at a latitude of  $45^\circ$  to properly define a force of 1 lb. Clearly the U.S. customary units do not form an absolute system of units. Because of their dependence upon the gravitational attraction of the earth, they form a *gravitational* system of units.

While the standard pound also serves as the unit of mass in commercial transactions in the United States, it cannot be so used in engineering mechanics computations, since such a unit would not be consistent with the base units defined in the preceding paragraph. Indeed, when acted upon by a force of 1 lb, that is, when subjected to the force of gravity, the standard pound receives the acceleration of gravity,  $g = 32.2 \text{ ft/s}^2$  (Fig. 1.4), not the unit acceleration required by Eq. (1.1). The unit of mass consistent with the foot, the pound, and the second is the mass which receives an acceleration of  $1 \text{ ft/s}^2$  when a force of 1 lb is applied to it (Fig. 1.5). This unit, sometimes called a *slug*, can be derived from the equation  $F = ma$  after substituting 1 lb and  $1 \text{ ft/s}^2$  for  $F$  and  $a$ , respectively. We write

$$F = ma \quad 1 \text{ lb} = (1 \text{ slug})(1 \text{ ft/s}^2)$$

and obtain

$$1 \text{ slug} = \frac{1 \text{ lb}}{1 \text{ ft/s}^2} = 1 \text{ lb} \cdot \text{s}^2/\text{ft} \quad (1.6)$$

Comparing Figs. 1.4 and 1.5, we conclude that the slug is a mass 32.2 times larger than the mass of the standard pound.

The fact that in the U.S. customary system of units bodies are characterized by their weight in pounds rather than by their mass in slugs will be a convenience in the study of statics, where one constantly deals with weights and other forces and only seldom with masses. However, in the study of dynamics, where forces, masses, and accelerations are involved, the mass  $m$  of a body will be expressed in slugs when its weight  $W$  is given in pounds. Recalling Eq. (1.4), we write

$$m = \frac{W}{g} \quad (1.7)$$

where  $g$  is the acceleration of gravity ( $g = 32.2 \text{ ft/s}^2$ ).

Other U.S. customary units frequently encountered in engineering problems are the *mile* (mi), equal to 5280 ft; the *inch* (in.), equal to  $\frac{1}{12}$  ft; and the *kilopound* (kip), equal to a force of 1000 lb. The *ton* is often used to represent a mass of 2000 lb but, like the pound, must be converted into slugs in engineering computations.

The conversion into feet, pounds, and seconds of quantities expressed in other U.S. customary units is generally more involved

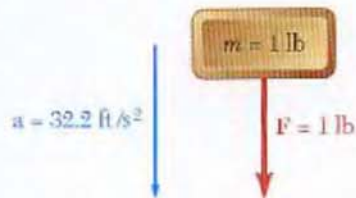


Fig. 1.4


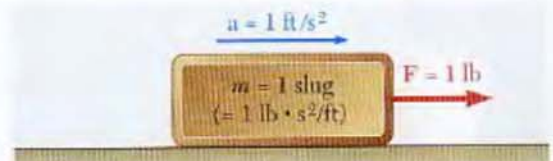


Fig. 1.5

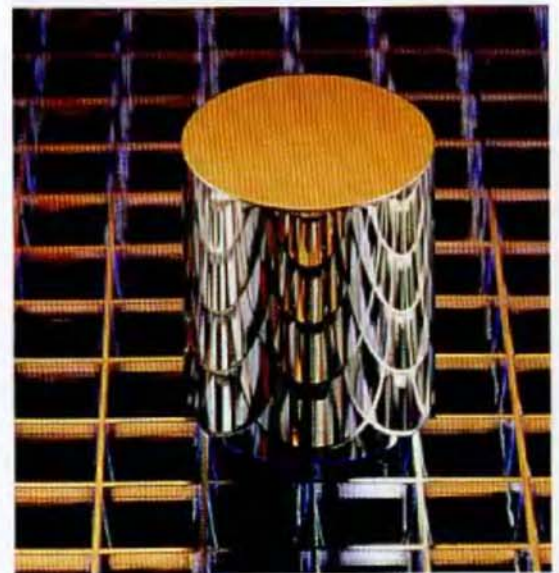

**Photo 1.2** The unit of mass is the only basic unit still based on a physical standard. Work is in progress to replace this standard with one based on unchanging natural phenomena.

and requires greater attention than the corresponding operation in SI units. If, for example, the magnitude of a velocity is given as  $v = 30$  mi/h, we convert it to ft/s as follows. First we write


$$v = 30 \frac{\text{mi}}{\text{h}}$$

Since we want to get rid of the unit miles and introduce instead the unit feet, we should multiply the right-hand member of the equation by an expression containing miles in the denominator and feet in the numerator. But, since we do not want to change the value of the right-hand member, the expression used should have a value equal to unity. The quotient  $(5280 \text{ ft})/(1 \text{ mi})$  is such an expression. Operating in a similar way to transform the unit hour into seconds, we write

$$v = \left(30 \frac{\text{mi}}{\text{h}}\right) \left(\frac{5280 \text{ ft}}{1 \text{ mi}}\right) \left(\frac{1 \text{ h}}{3600 \text{ s}}\right)$$

Carrying out the numerical computations and canceling out units which appear in both the numerator and the denominator, we obtain

$$v = 44 \frac{\text{ft}}{\text{s}} = 44 \text{ ft/s}$$

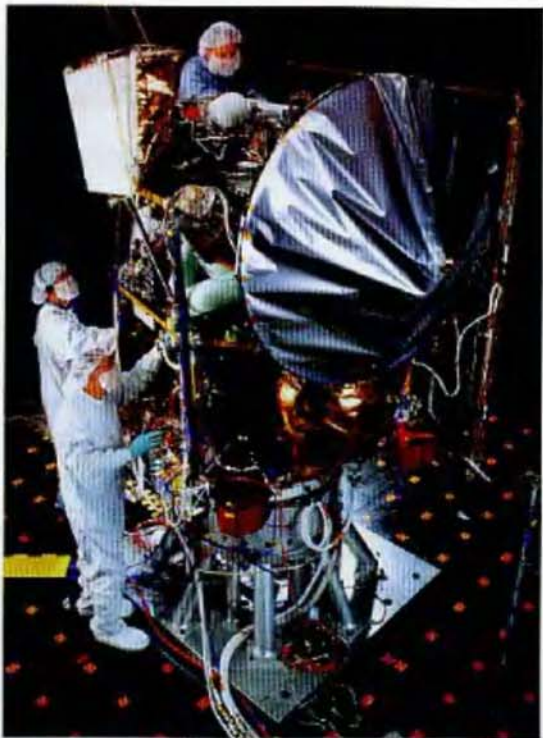

**Photo 1.3** The importance of including units in all calculations cannot be over emphasized. It was found that the \$125 million Mars Climate Orbiter failed to go into orbit around Mars because the prime contractor had provided the navigation team with operating data based on U.S. units rather than the specified SI units.

#### 1.4. CONVERSION FROM ONE SYSTEM OF UNITS TO ANOTHER

There are many instances when an engineer wishes to convert into SI units a numerical result obtained in U.S. customary units or vice versa. Because the unit of time is the same in both systems, only two kinetic base units need be converted. Thus, since all other kinetic units can be derived from these base units, only two conversion factors need be remembered.

**Units of Length.** By definition the U.S. customary unit of length is

$$1 \text{ ft} = 0.3048 \text{ m} \quad (1.8)$$

It follows that

$$1 \text{ mi} = 5280 \text{ ft} = 5280(0.3048 \text{ m}) = 1609 \text{ m}$$

or

$$1 \text{ mi} = 1.609 \text{ km} \quad (1.9)$$

Also

$$1 \text{ in.} = \frac{1}{12} \text{ ft} = \frac{1}{12}(0.3048 \text{ m}) = 0.0254 \text{ m}$$

or

$$1 \text{ in.} = 25.4 \text{ mm} \quad (1.10)$$

**Units of Force.** Recalling that the U.S. customary unit of force (pound) is defined as the weight of the standard pound (of mass 0.4536 kg) at sea level and at a latitude of  $45^\circ$  (where  $g = 9.807 \text{ m/s}^2$ ) and using Eq. (1.4), we write

$$W = mg$$

$$1 \text{ lb} = (0.4536 \text{ kg})(9.807 \text{ m/s}^2) = 4.448 \text{ kg} \cdot \text{m/s}^2$$

or, recalling Eq. (1.5),

$$1 \text{ lb} = 4.448 \text{ N} \quad (1.11)$$

**Units of Mass.** The U.S. customary unit of mass (slug) is a derived unit. Thus, using Eqs. (1.6), (1.8), and (1.11), we write

$$1 \text{ slug} = 1 \text{ lb} \cdot \text{s}^2/\text{ft} = \frac{1 \text{ lb}}{1 \text{ ft/s}^2} = \frac{4.448 \text{ N}}{0.3048 \text{ m/s}^2} = 14.59 \text{ N} \cdot \text{s}^2/\text{m}$$

and, recalling Eq. (1.5),

$$1 \text{ slug} = 1 \text{ lb} \cdot \text{s}^2/\text{ft} = 14.59 \text{ kg} \quad (1.12)$$

Although it cannot be used as a consistent unit of mass, we recall that the mass of the standard pound is, by definition,

$$1 \text{ pound mass} = 0.4536 \text{ kg} \quad (1.13)$$

This constant may be used to determine the *mass* in SI units (kilograms) of a body which has been characterized by its *weight* in U.S. customary units (pounds).

To convert a derived U.S. customary unit into SI units, one simply multiplies or divides by the appropriate conversion factors. For example, to convert the moment of a force which was found to be  $M = 47 \text{ lb} \cdot \text{in.}$  into SI units, we use formulas (1.10) and (1.11) and write

$$M = 47 \text{ lb} \cdot \text{in.} = 47(4.448 \text{ N})(25.4 \text{ mm})$$

$$= 5310 \text{ N} \cdot \text{mm} = 5.31 \text{ N} \cdot \text{m}$$

The conversion factors given in this section may also be used to convert a numerical result obtained in SI units into U.S. customary units. For example, if the moment of a force was found to be  $M = 40 \text{ N} \cdot \text{m}$ , we write, following the procedure used in the last paragraph of Sec. 1.3,

$$M = 40 \text{ N} \cdot \text{m} = (40 \text{ N} \cdot \text{m}) \left( \frac{1 \text{ lb}}{4.448 \text{ N}} \right) \left( \frac{1 \text{ ft}}{0.3048 \text{ m}} \right)$$

Carrying out the numerical computations and canceling out units which appear in both the numerator and the denominator, we obtain

$$M = 29.5 \text{ lb} \cdot \text{ft}$$

The U.S. customary units most frequently used in mechanics are listed in Table 1.3 with their SI equivalents.

## 1.5. METHOD OF PROBLEM SOLUTION

You should approach a problem in mechanics as you would approach an actual engineering situation. By drawing on your own experience and intuition, you will find it easier to understand and formulate the problem. Once the problem has been clearly stated, however, there is

**Table 1.3. U.S. Customary Units and Their SI Equivalents**

Quantity	U.S. Customary Unit	SI Equivalent
Acceleration	ft/s <sup>2</sup>	0.3048 m/s <sup>2</sup>
	in./s <sup>2</sup>	0.0254 m/s <sup>2</sup>
Area	ft <sup>2</sup>	0.0929 m <sup>2</sup>
	in <sup>2</sup>	645.2 mm <sup>2</sup>
Energy	ft · lb	1.356 J
Force	kip	4.448 kN
	lb	4.448 N
	oz	0.2780 N
Impulse	lb · s	4.448 N · s
Length	ft	0.3048 m
	in.	25.40 mm
	mi	1.609 km
Mass	oz mass	28.35 g
	lb mass	0.4536 kg
	slug	14.59 kg
	ton	907.2 kg
Moment of a force	lb · ft	1.356 N · m
	lb · in.	0.1130 N · m
Moment of inertia		
	Of an area	in <sup>4</sup>
Of a mass	lb · ft · s <sup>2</sup>	1.356 kg · m <sup>2</sup>
Momentum	lb · s	4.448 kg · m/s
Power	ft · lb/s	1.356 W
	hp	745.7 W
Pressure or stress	lb/ft <sup>2</sup>	47.88 Pa
	lb/in <sup>2</sup> (psi)	6.895 kPa
Velocity	ft/s	0.3048 m/s
	in./s	0.0254 m/s
	mi/h (mph)	0.4470 m/s
	mi/h (mph)	1.609 km/h
Volume	ft <sup>3</sup>	0.02832 m <sup>3</sup>
	in <sup>3</sup>	16.39 cm <sup>3</sup>
	Liquids	gal
	qt	0.9464 L
Work	ft · lb	1.356 J

no place in its solution for your particular fancy. *The solution must be based on the six fundamental principles stated in Sec. 1.2 or on theorems derived from them.* Every step taken must be justified on that basis. Strict rules must be followed, which lead to the solution in an almost automatic fashion, leaving no room for your intuition or "feeling." After an answer has been obtained, it should be checked. Here again, you may call upon your common sense and personal experience. If not completely satisfied with the result obtained, you should carefully check your formulation of the problem, the validity of the methods used for its solution, and the accuracy of your computations.

The *statement* of a problem should be clear and precise. It should contain the given data and indicate what information is required. A neat drawing showing all quantities involved should be included. Separate diagrams should be drawn for all bodies involved, indicating clearly the forces acting on each body. These diagrams are known as *free-body diagrams* and are described in detail in Secs. 2.11 and 4.2.

The *fundamental principles* of mechanics listed in Sec. 1.2 will be used to write equations expressing the conditions of rest or motion of the bodies considered. Each equation should be clearly related to one of the free-body diagrams. You will then proceed to solve the problem, observing strictly the usual rules of algebra and recording neatly the various steps taken.

After the answer has been obtained, it should be *carefully checked*. Mistakes in *reasoning* can often be detected by checking the units. For example, to determine the moment of a force of 50 N about a point 0.60 m from its line of action, we would have written (Sec. 3.12)

$$M = Fd = (50 \text{ N})(0.60 \text{ m}) = 30 \text{ N} \cdot \text{m}$$

The unit  $\text{N} \cdot \text{m}$  obtained by multiplying newtons by meters is the correct unit for the moment of a force; if another unit had been obtained, we would have known that some mistake had been made.

Errors in *computation* will usually be found by substituting the numerical values obtained into an equation which has not yet been used and verifying that the equation is satisfied. The importance of correct computations in engineering cannot be overemphasized.

## 1.6. NUMERICAL ACCURACY

The accuracy of the solution of a problem depends upon two items: (1) the accuracy of the given data and (2) the accuracy of the computations performed.

The solution cannot be more accurate than the less accurate of these two items. For example, if the loading of a bridge is known to be 75,000 lb with a possible error of 100 lb either way, the relative error which measures the degree of accuracy of the data is

$$\frac{100 \text{ lb}}{75,000 \text{ lb}} = 0.0013 = 0.13 \text{ percent}$$

In computing the reaction at one of the bridge supports, it would then be meaningless to record it as 14,322 lb. The accuracy of the solution cannot be greater than 0.13 percent, no matter how accurate the computations are, and the possible error in the answer may be as large as  $(0.13/100)(14,322 \text{ lb}) \approx 20 \text{ lb}$ . The answer should be properly recorded as  $14,320 \pm 20 \text{ lb}$ .

In engineering problems, the data are seldom known with an accuracy greater than 0.2 percent. It is therefore seldom justified to write the answers to such problems with an accuracy greater than 0.2 percent. A practical rule is to use 4 figures to record numbers beginning with a "1" and 3 figures in all other cases. Unless otherwise indicated, the data given in a problem should be assumed known with a comparable degree of accuracy. A force of 40 lb, for example, should be read 40.0 lb, and a force of 15 lb should be read 15.00 lb.

Pocket electronic calculators are widely used by practicing engineers and engineering students. The speed and accuracy of these calculators facilitate the numerical computations in the solution of many problems. However, students should not record more significant figures than can be justified merely because they are easily obtained. As noted above, an accuracy greater than 0.2 percent is seldom necessary or meaningful in the solution of practical engineering problems.

The first part of the paper discusses the general principles of the theory of the atom. It is shown that the atom is a system of particles which are in constant motion. The motion of the particles is determined by the forces acting on them. The forces are of two kinds: attractive and repulsive. The attractive forces are due to the attraction between the particles, and the repulsive forces are due to the repulsion between the particles. The motion of the particles is such that the total energy of the system is constant. This is the principle of conservation of energy.

The second part of the paper discusses the application of the theory of the atom to the study of the spectrum of light. It is shown that the spectrum of light is a result of the interaction of the light with the atoms. The light is emitted by the atoms when they transition from a higher energy state to a lower energy state. The energy of the light is equal to the difference in energy between the two states. This is the principle of conservation of energy.

The third part of the paper discusses the application of the theory of the atom to the study of the spectrum of matter. It is shown that the spectrum of matter is a result of the interaction of the matter with the atoms. The matter is emitted by the atoms when they transition from a higher energy state to a lower energy state. The energy of the matter is equal to the difference in energy between the two states. This is the principle of conservation of energy.

The fourth part of the paper discusses the application of the theory of the atom to the study of the spectrum of the universe. It is shown that the spectrum of the universe is a result of the interaction of the universe with the atoms. The spectrum of the universe is a result of the interaction of the universe with the atoms. The energy of the spectrum of the universe is equal to the difference in energy between the two states. This is the principle of conservation of energy.